

Kepler P18

TECHNICS

TECHNICAL DATA

Height	3540 mm
Width	2860 mm
Length	3160 mm
Weight	650 Kg
Power supply	400 VAC 3 PH+N
Power absorption	4 kW

Power Pre-Stretch
Very Light Stretch
For Unstable Pallet
Low Price



All the advantages of a rotating arm stretch wrapping machine in a very low price.
The rotating arm wrapping machine is the perfect solution for heavy or unstable pallets.

Evopac Kepler has been designed to offer in a very low price all the advantages of a rotating arm stretch wrapping machine. Design simplicity doesn't have to mislead about the features of this pallet wrapper: frequency controller for every motor, standard power pre-stretch, maximum speed 18 RPM.


Evopac Kepler can be mounted on wall or on foot.
The film tension can be very light and this is really important when pallets are unstable: **Evopac Kepler** can really wrap even air!

Kepler P18



Product Specifications

- Automatic cycle for film hooking, pallet wrapping, film cold cutting and film hot sealing
- Air device to blow up the film tail
- PLC Siemens S7 1200
- Operator panel Siemens KTP 600
- Frequency controller for carriage speed adjustment
- Frequency controller for arm rotation speed adjustment
- Maximum height of pallet: 2400 mm (less the conveyor height)
- Max size of the pallet: 1200x1000 mm
- Power pre-stretch carriage
- Photocell to detect the pallet height
- Safety stop loop at the base of the mast
- Stop at 0 position
- Power board IP54
- Lock password (parameters values can be modified only entering a password)
- Adjustable parameters by the control panel: cycle selection, bottom laps, top laps, topsheet cycle parameters, rotation speed, carriage ascent speed, carriage descent speed, film tension
- 3 working cycles: ascent/descent; topsheet; layers
- Storage of 10 end user programs
- 4 working ways: semimanual, semiautomatic, fixed height; automatic
- Strengthening operation
- Acoustic warning at the cycle beginning and stop
- Autodiagnostic
- Wrapped pallet counter
- Powder coating
- Braked arm at the end of the cycle

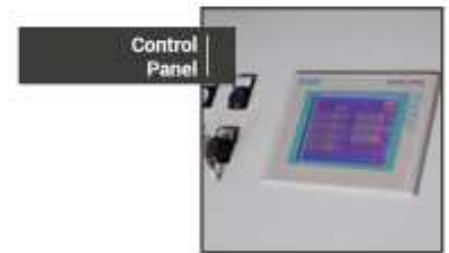

MAIN OPTIONS

Adjustable power pre-stretch
3000 mm max wrapping height
Bigger arm radius for 1200x1200 pallets
Photocell for dark loads
Safety fences
Top-sheet dispenser
Roller conveyors
Chain conveyors
Lifter